

Cat6Plus Unscreened Snap-In Jack

Datasheet: GD032299v9

Brand-Rex | a **LEVITON** company

APPLICATION

The Brand Rex CAT6Plus Unscreened Snap-In Jack offers true Category 6 component performance using a new, patented contact pin array design. UK Patent Application No. GB0222891.4. The jack is backward compatible and also fully compatible with all our UK and Continental style faceplates and products. Each jack is supplied with a short form installation instruction.

FEATURES


- Patented Pin Array, Brand-Rex technology inside
- Cat6 Performance
- Both LSA and 110 Style available
- Available in 2 black or white



ORDER INFO

Brand-Rex Part Number	Item Description	Colour	Weight per Item (nom)	Qty per Pack
C6CJAKU0K2	Cat6Plus Unscreened LSA Style Snap-In Jack	Black	25	12
C6CJAKU0K3	Cat6Plus Unscreened LSA Style Snap-In Jack	White	25	12
C6CJAKU012	Cat6Plus Unscreened 110 Style Snap-In Jack	Black	25	12
C6CJAKU013	Cat6Plus Unscreened 110 Style Snap-In Jack	White	25	12

PHYSICAL CHARACTERISTICS

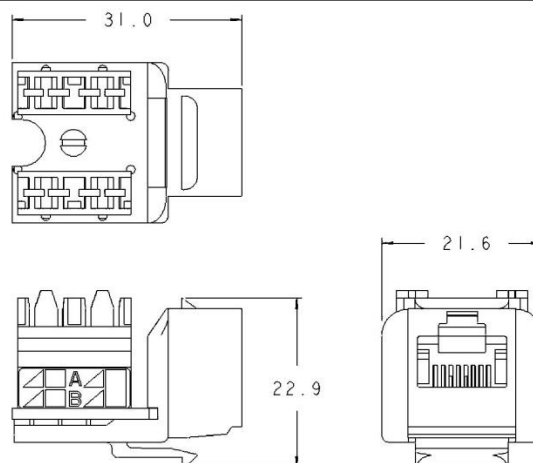

Cat6Plus Unscreened Snap-In Jack

Datasheet: GD032299v9

Brand-Rex | a **LEVITON** company

APPLICABLE PRODUCT STANDARDS

- ISO/IEC category: Category 6 performance connector for use in Class E cabling systems
- ISO/IEC 11801 ed 2.2 (2011)
- IEC 60603-7, -7-1, 7-41 and -7-51
- EIA/TIA 568C series: Category 6 performance

REGULATIONS & COMPLIANCE

- RoHS 2011/65/EU Compliant

ELECTRICAL CHARACTERISTICS

- Voltage Proof: 1500V dc / ac peak
- Current-temperature derating: compliant with IEC 60603-7
- Contact Resistance: <20mΩ
- Insulation Resistance: >500MΩ
- Coupling attenuation: >61dB

COMPATIBILITY MATRIX

Catalogue Number	Description
MMCPNLX24SIJ*	1RU 24-Port Modular Staggered Snap-In Jack Panel
MMCPNLX24SIJ*M-B	1RU 24-Port Modular Staggered Snap-In Jack Panel with Management Bar
MMCPNLX48SIJ*	3RU 48-Port Modular Snap-In Jack Panel
49223-CBC	QuickPort In-Ceiling Bracket, includes clip for drop wire/rod mounting
49223-CB0	QuickPort In-Ceiling Bracket, no clip
MMCWDOUNI070	86 x 86 mm 1- Port Shuttered Faceplate
MMCWDOUNI071	86 x 86 mm 2- Port Shuttered Faceplate
MMCWDO06C001	25 x 38 mm Shuttered Floorbox Module
MMCANG06C3	25 x 38 mm Angled Shuttered Floorbox Module
MMCWDOUNI062	25 x 50 mm Shuttered Faceplate Module
MMCANG0623	25 x 50 mm Angled Faceplate Module
MMCANGLGS45002UK	50 x 50 mm 1-Port Angled Snap-In Jack Module
MMCUNILGS45001	1-Port Snap-In Jack Module
MMCANGLGS45002	1-Port Angled Snap-In Jack Module 45 x 45 mm
MMCANGDK1453	1-Port 50 x 50 mm German-style Snap-In Jack Module
MMCANGDK2453	2-Port 50 x 50 mm German-style Snap-In Jack Module
MMCUSIJ2002LO	70 x 115 mm 2-Port Horizontal Faceplate with Brand-Rex logo
MMCUSIJ4001LO	70 x 115 mm 4-Port Faceplate with Brand-Rex logo
MMCUSIJ4001LOICO	70 x 115 mm 4-Port Faceplate with Brand-Rex logo and options for icons

*"Brand-Rex is **dedicated to designing, developing and manufacturing sustainable high performance structured cabling and speciality cabling solutions**"*

The information contained in this document is valid and correct at the time of issue. Brand-Rex reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.

MECHANICAL SPECIFICATION

- IDC Contacts: Accept solid wires 26-22AWG and stranded wires 26-24 AWG.
- Apertures: The product fits into 14.9mm x 19.8mm (WxH) cut outs with 1.5-1.6mm plate thickness.
- Repeat plug insertions: >750 mating cycles with an IEC 60603-7 compliant plug
Product tested to 2500 insertion cycles
- Wiring: T568 A and B wiring types
- Contact Pins: Phosphor Bronze, Nickel Plated with selective gold plating (50micro-inch min) over contact area
- Note that each product pack contains a full installation instruction.

ENVIRONMENTAL CONDITIONS

- Operating temperature from -10°C to 60°C at 93% relative humidity, non-condensing
- Storage temperature from -40°C to 70°C